

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 June 2006 (15.06.2006)

PCT

(10) International Publication Number
WO 2006/062467 A1

(51) International Patent Classification:
C02F 1/32 (2006.01)

(21) International Application Number:
PCT/SE2005/001837

(22) International Filing Date:
6 December 2005 (06.12.2005)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0402968-2 7 December 2004 (07.12.2004) SE

(71) Applicant (for all designated States except US): **GLOW AB** [SE/—]; Johanneshöjden 8, SE-722 19 Västerås (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LARSSON, Anders** [SE/SE]; Johanneshöjden 8, S-722 19 Västerås (SE).

(74) Agent: **ERIKSSON, Kjell**; Norrtälje Patentbyrå AB, Box 38, S-761 21 Norrtälje (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: WATER PURIFIER

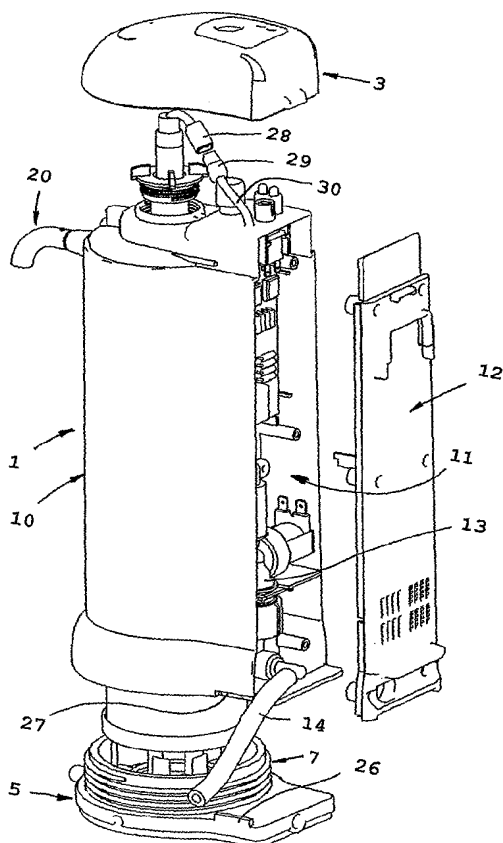

(57) Abstract: The present invention relates to a water purifier for the purification of pressurized water, said water purifier comprising a filter chamber (16) with a cylindrical adsorption filter (17), a UV chamber (19) that is provided inside the adsorption filter (17), an incoming water intake (15) to the filter chamber (16), a spout (20) emanating from the filter chamber (16) for the discharge of water from the filter chamber (16), a space (11) laterally displaced relative to the filter chamber (16), components for the control of the function of the water purifier being received in said space (11), an upper demountable part (3) and a lower demountable part (5). It is significant of the water purifier according to the present invention that the connection of the incoming water is made to a central main portion (1) of the water purifier, that the discharge of the purified water is effected from the central main portion (1), and that the central main portion (1) is located between the demountable parts (3, 5).

WO 2006/062467 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WATER PURIFIER**Technical Field of the Invention**

The present invention relates to a water purifier for the purification of pressurized water, said water purifier comprising a filter chamber with a filter, a UV chamber that is provided inside the filter, an incoming water intake to the filter chamber, a spout emanating from the UV chamber for the discharge of water from the UV chamber, a space separated from the filter chamber, components for the control of the function of the water purifier being received in said space, an upper demountable part and a lower demountable part.

Prior Art

From GB 2 175 779 A a water purifier is previously known that comprises a UV lamp for purifying the water that passes through the water purifier. In an external space, outside the water purifier itself, certain peripheral equipment is provided to control the functions of the water purifier. The water purifier has also two end caps that are provided with passages, e.g. for electric cables.

From US-A-5,266,215 a water purifier is previously known, said purifier comprising a carbon filter cartridge and a UV lamp, the carbon filter cartridge surrounding the UV lamp. When exchanging the carbon filter cartridge a threaded upper cover is removed and when the UV lamp is exchanged a bottom part is demounted, said bottom part being fastened to the rest of the water purifier by a number of radial screws. The carbon filter cartridge has an axial extension along approximately half the effective height of the water purifier. The supplied water, i.e. the water to be purified, is entered via the bottom part and the output water, i.e. the purified water, is discharged from the water purifier via the upper cover.

Objects and Features of the Invention

A primary object of the invention is to present a water purifier of the type defined above, the water purifier being extremely user friendly as regards maintenance and exchange of

consumption parts of the water purifier, e.g. filters, UV lamp and quartz glass tube.

5 A further object of the present invention is that the water purifier should be extremely simple and inexpensive to manufacture.

10 Still an object of the present invention is that the components that control the function of the water purifier should be assembled and protected in an easily accessible space that also is separated from the space that receives the consumption parts.

15 At least the primary object of the present invention is realized by means of a water purifier that has been given the features of the appending independent claim 1. Preferred embodiments of the invention are defined in the dependent claims.

Brief Description of the Drawings

20 Below preferred embodiments of the invention will be described, reference being made to the accompanying drawings, where:

- Figure 1 shows a perspective view of a water purifier according to the present invention, a bottom part of the water purifier being somewhat turned relative to the rest of the water purifier;
- 25 Figure 2 shows a perspective exploded view of the water purifier according to figure 1, a cap, a bottom part and a back of the water purifier being demounted;
- Figure 3 shows a longitudinal section through the water purifier in the position according to figure 2, the back being mounted and the section being located in the longitudinal centre of the water purifier;
- 30 Figure 4 shows a longitudinal section through the water purifier in assembled state, the section being located in the longitudinal centre of the water purifier;
- 35 Figure 5 shows a section through a lower portion of a water purifier according to the present invention where the bottom part and the lower portion of the main

portion have an alternative design, the bottom part being in a an inner position;

Figure 6 shows the corresponding lower portion of the water purifier as in figure 5, the bottom part however
5 being in an outer position; and

Figure 7 shows a perspective view of an upper portion of an alternative embodiment of a water purifier according to the present invention.

10 Detailed Description of Preferred Embodiments of the Invention

The water purifier shown in figure 1 comprises a main portion 1 with elongated shape, a cover 3 and a bottom part 5. In the shown embodiment the cover 3 is detachably connected to the main portion 1 by means of a snap-on connection while the
15 bottom part 5 is connected to the main portion 1 by means of a thread coupling. To that purpose the bottom part 5 has an external thread 7 while the main portion 1 has an internal thread 9, see figure 3. Thus, the main portion is a central portion that is located between the cover 3 and the bottom
20 part 5. As is most evident from figure 2 a control button 4 and indication lamps are provided on top of the main portion 1. By means of the control button 4 the function of the water purifier is activated and by means of the indication lamps 6 the user is given information, e.g. about exchange of filter
25 or degree of purification as regards the water discharged from the water purifier.

As is most evident from figure 3 the cover 3 is equipped with holes 8 intended for the control button and the indication lamps 6.

30 The main portion 1 of the water purifier according to the present invention comprises an external casing 10, see figure 2, that holds in principle all components essential to the function of the water purifier. The casing is preferably an injection moulded plastic article, i.e. it is manufactured
35 in one piece.

As is most evident from figure 2 the main portion comprises a laterally displaced space 11 that is defined on one hand of parts of the casing 10 and on the other hand of a back 12 that is detachable relative to the casing 10. In the

space 11 certain electronic components are provided as well as an inlet valve 13 for the incoming water, said water normally coming from a pressurized water supply, said supply could be a part of a municipal water supply system or constitute a pressure tank in a private water supply system. As is shown in figure 2 an inlet pipe 14 for the incoming water is connected to the inlet valve 13. As is most evident from figure 3 a connecting pipe 15 extends between the inlet valve 13 and a filter chamber 16 of the main portion 1. The filter chamber 16 is defined on one hand by parts of the casing 10 and on the other hand by the bottom part 5. The casing 10 has a partition 21 that constitutes a part of the filter chamber 16. The partition 21 also constitutes a part of the laterally displaced space 11.

In the shown embodiment a filter 17 is provided in the filter chamber 16, said filter 17 being both a mechanical filter and an adsorption filter (carbon filter), a UV-chamber 19 that is provided inside the filter 17, a quartz glass tube 22 provided inside the UV-chamber 19 and a UV-lamp 18 provided inside the quartz glass tube 22.

As is most evident from figure 2 a first part 28 of a plug-in unit is provided at the upper end of the UV-lamp 18 while a second part 29 of the plug-in unit is connected to the laterally displaced space 11 via a cable 30.

In the shown embodiment the filter 17 generally is in the shape of a cylinder with a certain wall thickness. The internal space of the cylinder accommodates the UV chamber 19, the quartz glass tube 22 and the UV-lamp 18. As is most evident from figure 3 the quartz glass tube 22 is equipped with a threaded socket 24 that is received in a threaded holder 23 of the casing 10. When the quartz glass tube 22 is demounted the socket 24 is unscrewed from the holder 23, see figure 3.

In figure 4 it is schematically shown how the water entering the filter chamber 16 is passing through the filter 17, into the UV-chamber 19, by an opening 33 that is located at the lower part of the water purifier, and upwards along the quartz glass tube 22 that surrounds the UV-lamp 18. In this connection it should be mentioned that the water purifier

according to the present invention is equipped with a UV-sensor 31 that registers the intensity from the UV-lamp 18, the UV-sensor 31 being located in the laterally displaced space 11. A light guide 32 is connected to the UV-sensor 31, said light guide 32 extending into the UV-chamber 19. The light guide 32 is received in a passage that extends between the UV-chamber 19 and the laterally displaced space 11. The light guide 32 may for instance be manufactured from quartz glass. The function of the UV-sensor 31 is to control, via the light guide 32, that the level of intensity in the UV-chamber 19 is sufficient to have an acceptable disinfection of the water.

The water that is purified in the water purifier is discharged from the UV-chamber 19 via a spout 20 that is provided in the upper region of the main portion 1. Due to the pressure that is present in the water conduit system the water to be purified flows through the filter 17, through the UV-chamber 19 and out through the spout 20.

In figure 3 the exchange of the filter 17 and the UV-lamp 18 is illustrated. As regards the exchange of the filter 17 the bottom part 5 is removed from the main portion 1. This is effected by unscrewing the bottom part 5 from the main portion 1. In this connection it should be pointed out that the bottom part 5 does not have any connections or passages for pipes or cables. This is an essential advantage in connection with the unscrewing of the bottom part 5 from the main portion 1. In order to facilitate the turning of the bottom part 5 relative to the main portion 1 the bottom part 5 is equipped with a telescopic rod 25 that is displaceable in its longitudinal direction relative to the bottom part 5. Thus, the rod 25 may be transferred to an inactive position where it is fully received inside the bottom part 5. When the bottom part 5 is separated from the main portion 1 the filter 17 may be removed through the opening thus created. A new filter 17 may now be mounted in the filter chamber 16 and the bottom part 5 is again screwed to the main portion 1. In order to guarantee that the bottom part 5 assumes a correct position relative to the main portion 1 the bottom part 5 is

equipped with a stopper 26 that cooperates with an abutment surface 27 of the main portion 1.

When exchanging the UV-lamp 18 the cover 3 is removed from the main portion 1. This is a simple operation since the cover 3 is detachably connected to the main portion 1 via a snap-on connection. In this connection it should be pointed out that the cover is not equipped with any connections or passages for pipes or cables. This is an essential advantage in connection with the removal of the cover 3 from the main portion 1. Then the portions 28, 29 of the plug-in unit are separated and the UV-lamp 18 may be pulled out of the quartz glass tube 22.

If it comes to an exchange of the quartz glass tube 22 the socket 24 is unscrewed from the holder 23 and the quartz glass tube 22, with the UV-lamp 18, may be removed from the main portion 1. The quartz glass tube 22 may now be exchanged or cleaned.

If there is a need for maintenance or exchange of any of the components that are provided in the laterally displaced space 11 the back 12 is demounted and proper access to said components is achieved. In this connection it should be pointed out that the laterally displaced space 11, via the partition 21 of the casing 10, is completely separated from the filter chamber 16, i.e. there is no risk of water penetration into the laterally displaced space 11.

In figure 5 and 6 an alternative embodiment of the lower part of the main portion 101 and the bottom part 105 is shown. Thus, the main portion 101 is equipped with a first outlet opening 135 in the area of its lower end. The bottom part 105 has an annular first sealing 136 that extends around the bottom part 105 and rests upon a shoulder 137 of the bottom part 105. An external thread 107 of the bottom part 105 cooperates with an internal thread 109 in the area of the lower end of the main portion 101. According to this embodiment the bottom part 105 has no telescopic rod. The water purifier according to figures 5 and 6 also comprises a filter chamber 116, a filter 117 and a UV-chamber 119.

In the position of the bottom part 105 shown in figure 5, i.e. when the bottom part 105 is fully screwed into the

main portion 101, the first outlet opening 135 is blocked by the first sealing 136. In connection therewith a second opening 139 in the bottom of the filter chamber is sealed by a second sealing 140 that cooperates with an annular rim 141 of the bottom part 105.

In the position shown in figure 6, i.e. when the bottom part 105 is unscrewed to such a degree that the sealing 136 no longer blocks the opening 135 the water inside the water purifier may be discharged through the outlet opening 135. In connection therewith the water outside the filter flows in accordance with the arrows P1 while the water inside the UV-chamber 119 flows in accordance with the arrows P2. These two water flows are united in a common flow P3 in a bottom space 138 before the water is discharged through the outlet opening 135.

Figure 7 shows a perspective view of an upper part of a water purifier according to the present invention, a space 111 for electronic components being provided below the cover 103 in the area of the upper end of the water purifier. By this location of the space 111 the electronic components are closer to the control button 104 and the indication lamps 106. In the embodiment according to figures 1-4 the corresponding space 11 extends along an upper part of the main portion 1. In the space that has been made available by the embodiment according to figure 7 a device 145 has been provided, said device preventing dripping from the spout 20 of the water purifier. This device is previously known and works according to the ejector principle.

Generally, it should be pointed out that the components included in the water purifier, e.g. the inlet valve, the UV-lamp, the UV-sensor and the electronic peripheral equipment, demand electric current supply, the voltage of this electric current may vary in accordance with the circumstances. Normally, the voltage constitutes 220V or 110V. It is also possible to work with a voltage of 12V, this voltage may be given by a car battery. In this connection it should be pointed out that the mentioned voltage figures only constitutes examples. There may be voltages that differ from the given ones, the water purifier according to present

invention of course may be designed to handle also these voltages. In the present description of the water purifier no specific details are given about this current supply. The reason therefore is that the current supply is designed in a conventional way.

To sum up, the water purifier according to the present invention is designed in a way very much to the purpose. All connections of pipes and cables are made to the main portion 1. This means that the cover 3 and the bottom part 5 are completely separate parts without any attached pipes or cables.

Feasible Modifications of the Invention

In the embodiment described above the filter 17 constitutes a combined mechanical filter and an adsorption filter. Within the scope of the present invention it is feasible that the filter surrounding the UV-chamber 19 only constitutes an adsorption filter. In such a case it might be suitable with some kind of complementary filter that is provided in front of the connection of the inlet pipe 14 to the water purifier.

Claims

1. Water purifier for the purification of pressurized water, said water purifier comprising a filter chamber (16) with a
5 filter (17; 117), a UV-chamber (19; 119) with a UV-lamp (18; 118), the UV-chamber (19; 119) being provided inside the filter (17; 117), an incoming water intake (15) to the filter chamber (16), a spout (20) for the discharge of water from the UV-chamber (19; 119), a space (11; 111) separated from the
10 filter chamber (16), components for the control of the function of the water purifier being received in said space (11; 111), an upper demountable part (3) and a lower demountable part (5; 105), c h a r a c t e r i s e d in that the connection of the incoming water is made to a central main
15 portion (1; 101) of the water purifier, that the discharge of the purified water is effected from the central main portion (1; 101), and that the central main portion (1; 101) is located between the demountable parts (3, 5; 105).

20 2. Water purifier according to claim 1, c h a r a c t e r i s e d in that the main portion (1; 101) comprises a casing (10; 110) that is manufactured in one piece, and that the casing (10; 110) defines essential parts of the filter chamber (16; 116).

25 3. Water purifier according to claim 1 or 2, c h a r a c t e r i s e d in that the filter (17; 117) is exchangeable when the lower demountable part (5; 105) has been demounted from the main portion (1; 101).

30 4. Water purifier according to claim 3, c h a r a c t e r i s e d in that the lower demountable part (5; 105) is connected to the main portion (1; 101) by means of a thread coupling (7, 9; 107, 109).

35 5. Water purifier according to claim 4, c h a r a c t e r i s e d in that the lower demountable part (105) is equipped with an annular sealing (136), that an outlet opening (135) is provided in the area of the lower end

of the casing (110), and that the sealing (136) in active position blocks the outlet opening (135).

6. Water purifier according to any of the previous claims,
5 c h a r a c t e r i s e d in that the UV-lamp (18; 118) is exchangeable when the upper demountable part (3) has been demounted from the main portion (1; 101).

7. Water purifier according to any of the previous claims,
10 c h a r a c t e r i s e d in that it comprises a laterally displaced space (11) that is equipped with a demountable back (12).

8. Water purifier according to claim 7,
15 c h a r a c t e r i s e d in that an inlet valve (13) is provided in the laterally displaced space (11), and that the inlet valve (13) has means to connect to a pipe (14) for incoming water.


20 9. Water purifier according to claim 8,
c h a r a c t e r i s e d in that the water that passes the inlet valve (13) is supplied to the filter chamber (16) in a region between the two demountable parts (3, 5; 105).

25 10. Water purifier according to any of the previous claims,
c h a r a c t e r i s e d in that it comprises a UV-sensor (31) that registers the intensity from the UV-lamp (18; 118), and that a light guide (32) extends into the UV-chamber (19; 119), said light guide being connected to the UV-sensor (31).

30


1/6

Fig. 1

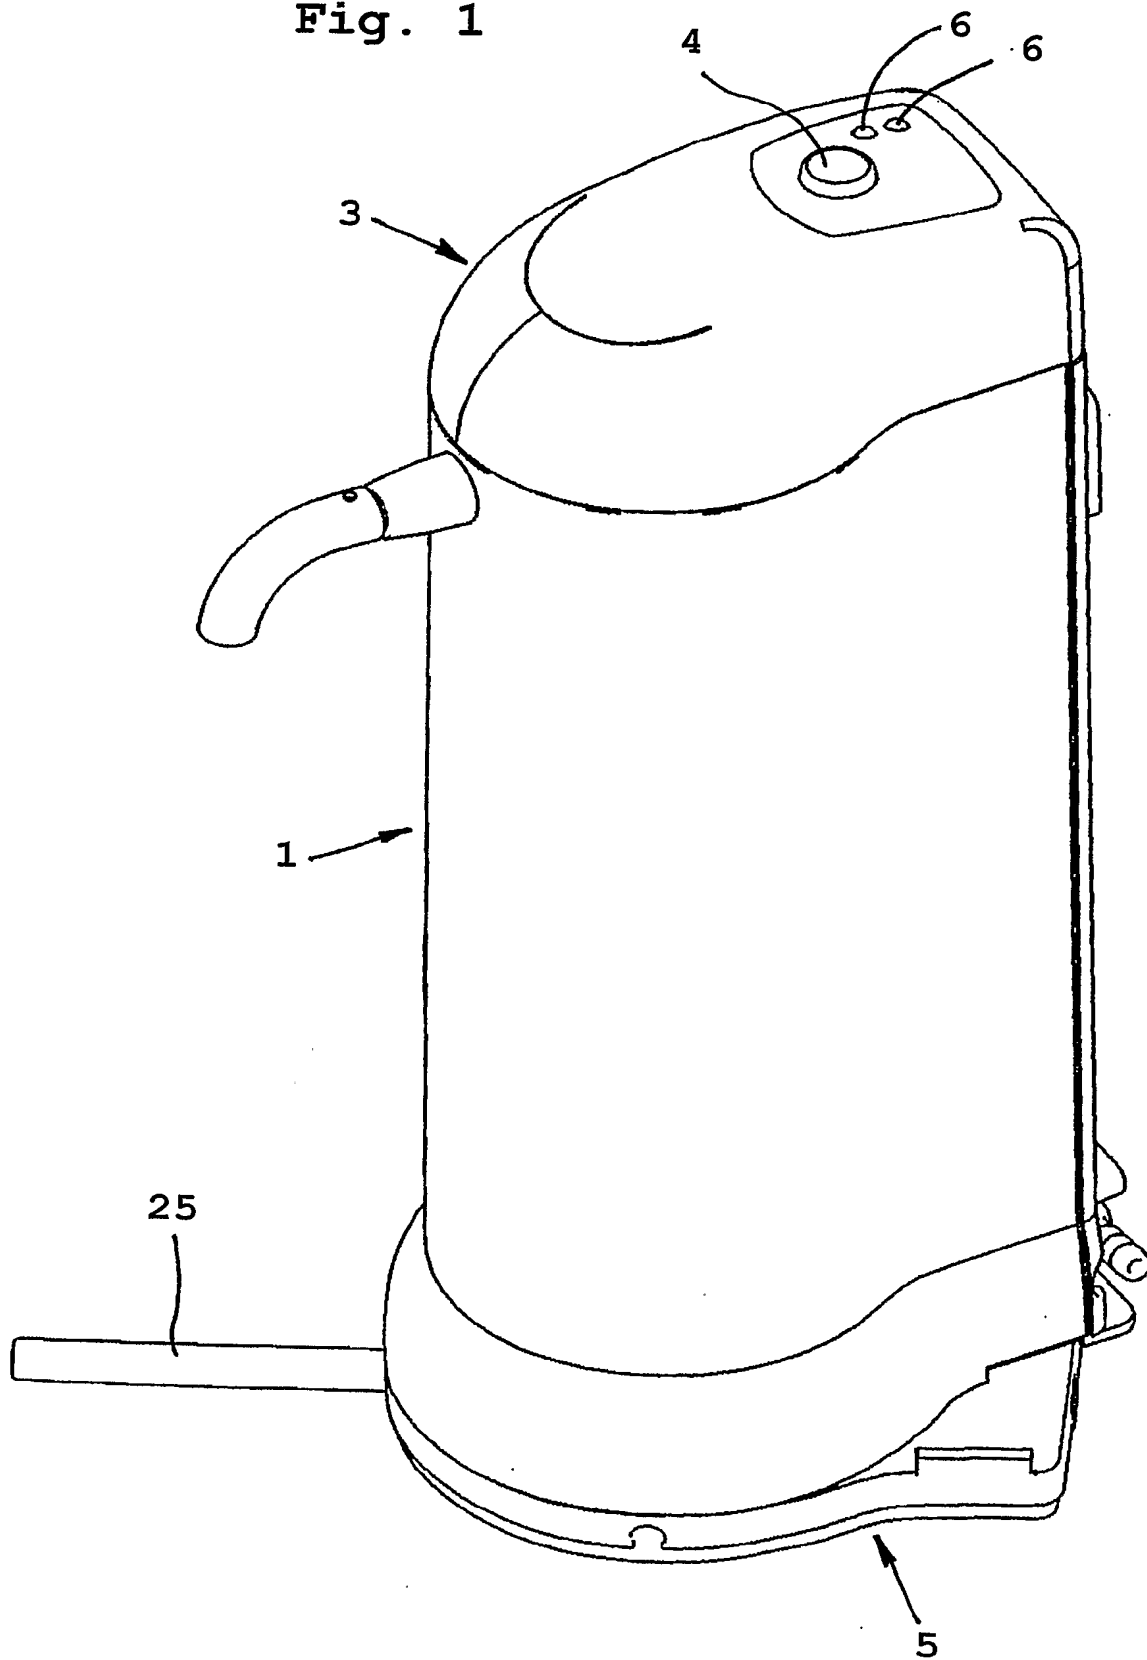


2/6

Fig. 2

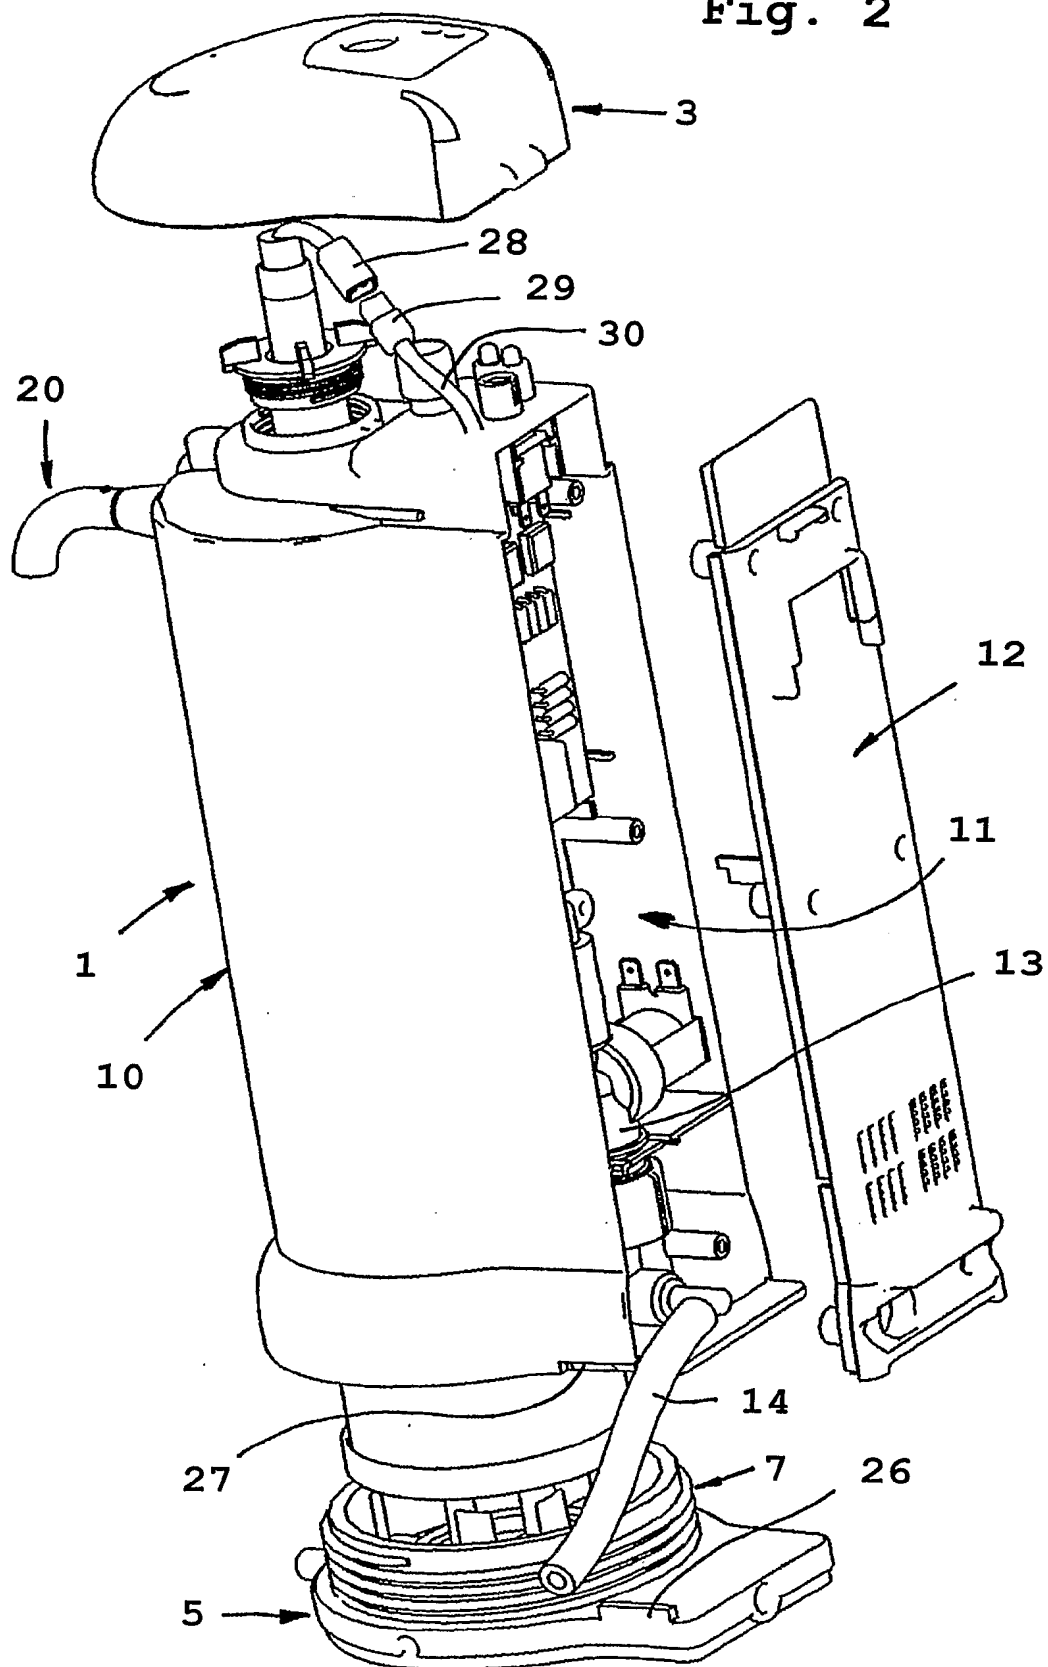


3/6

Fig. 3

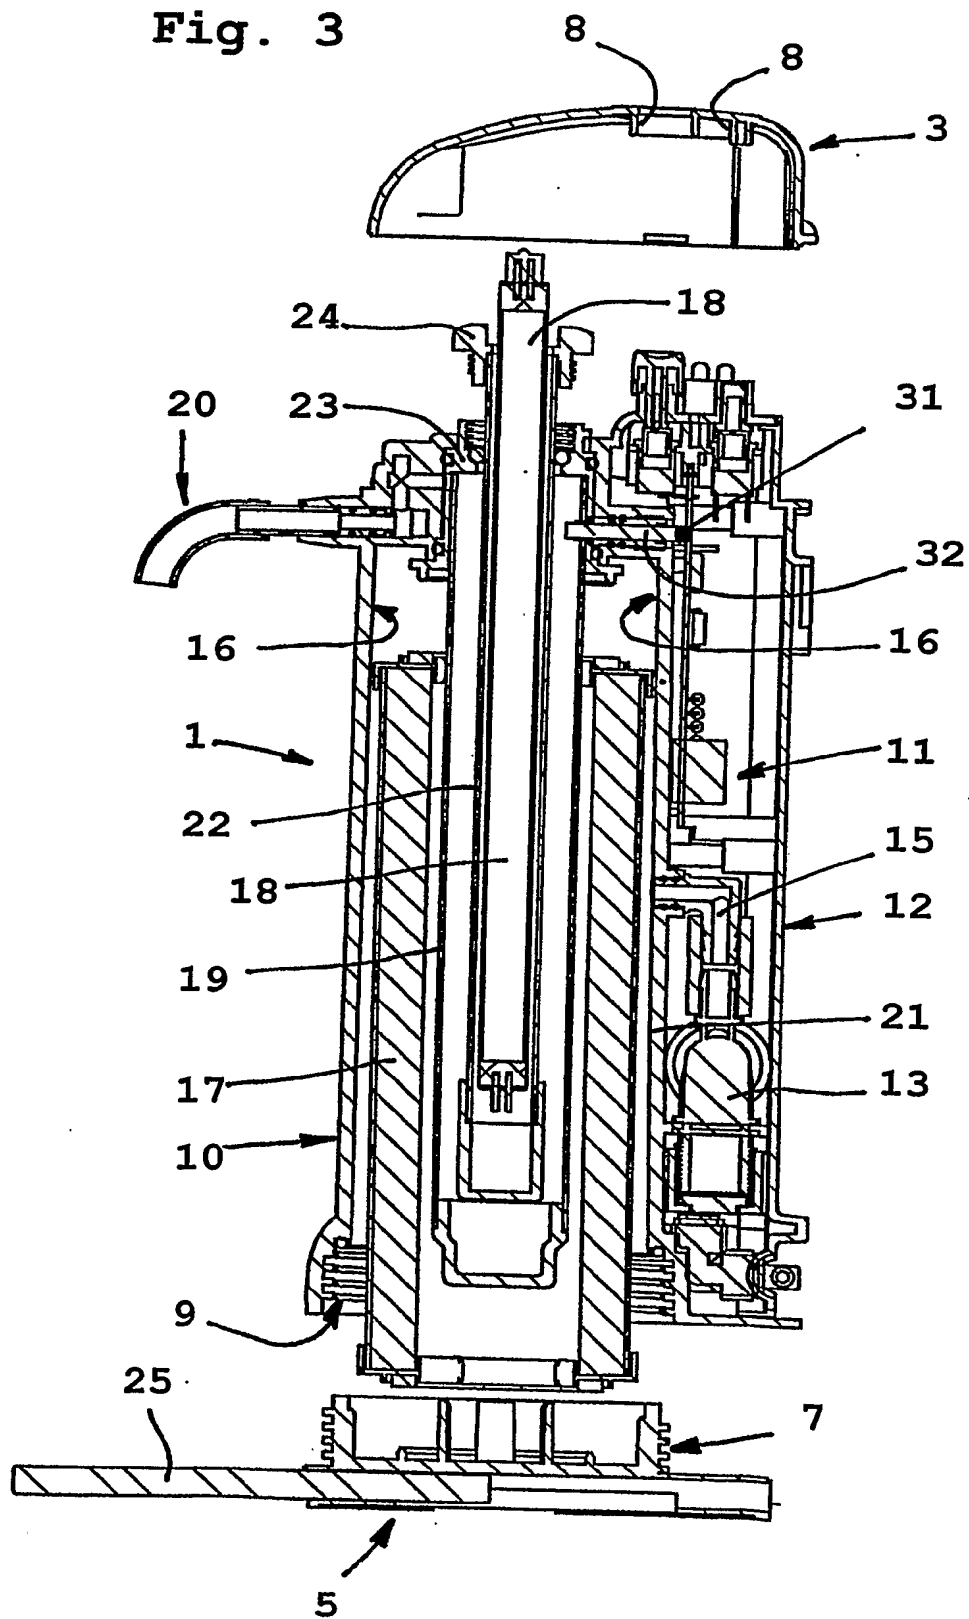

4/6

Fig. 4

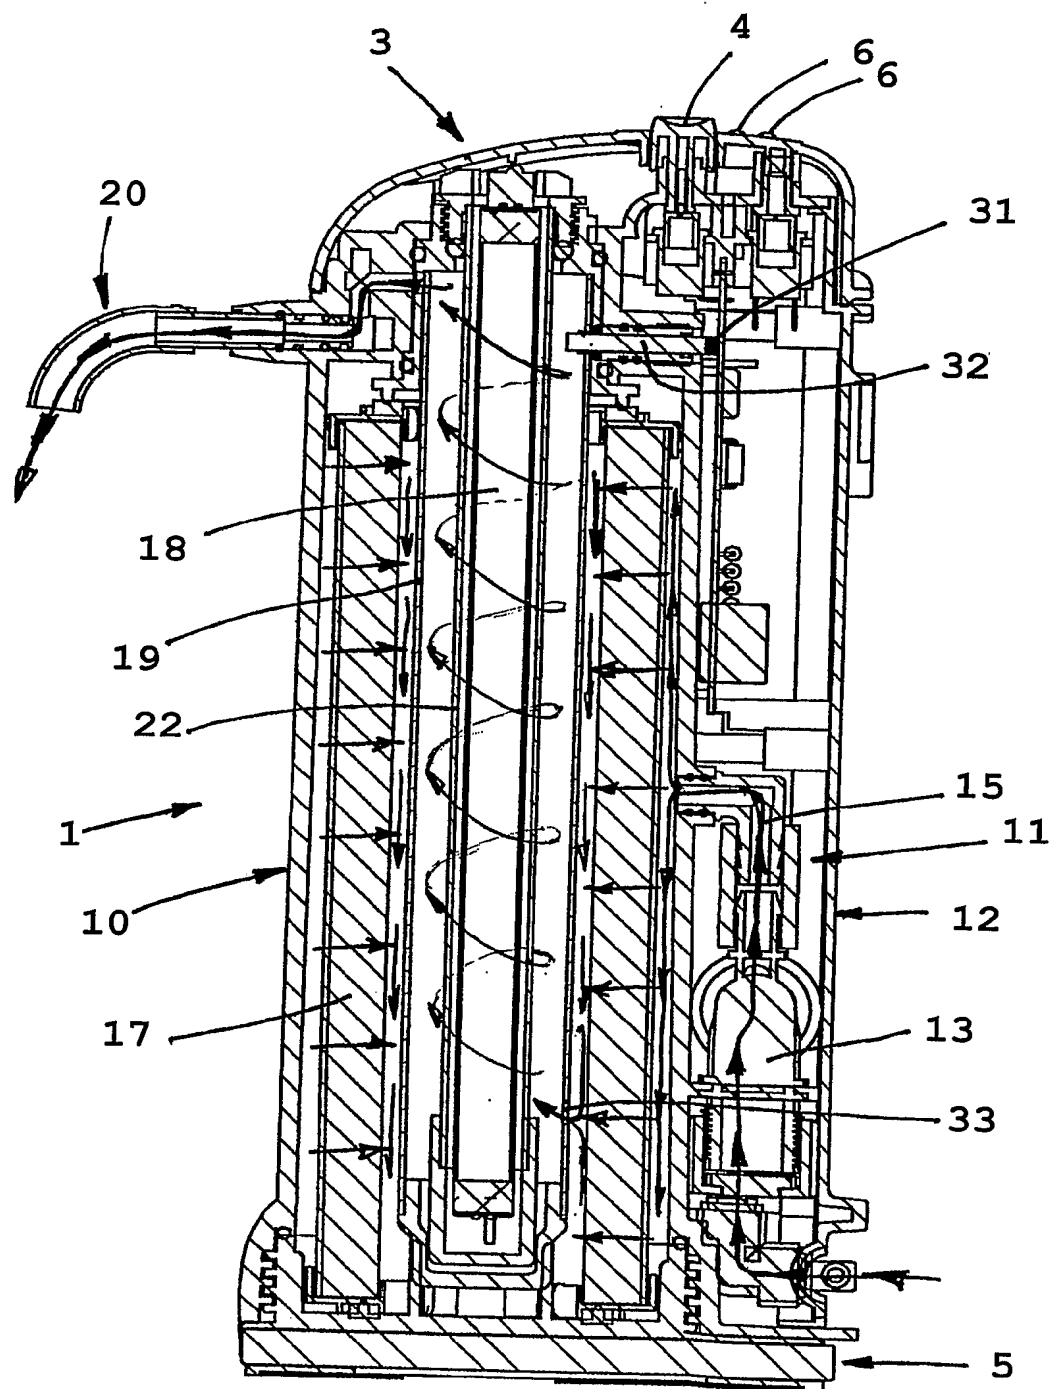

5/6

Fig. 5



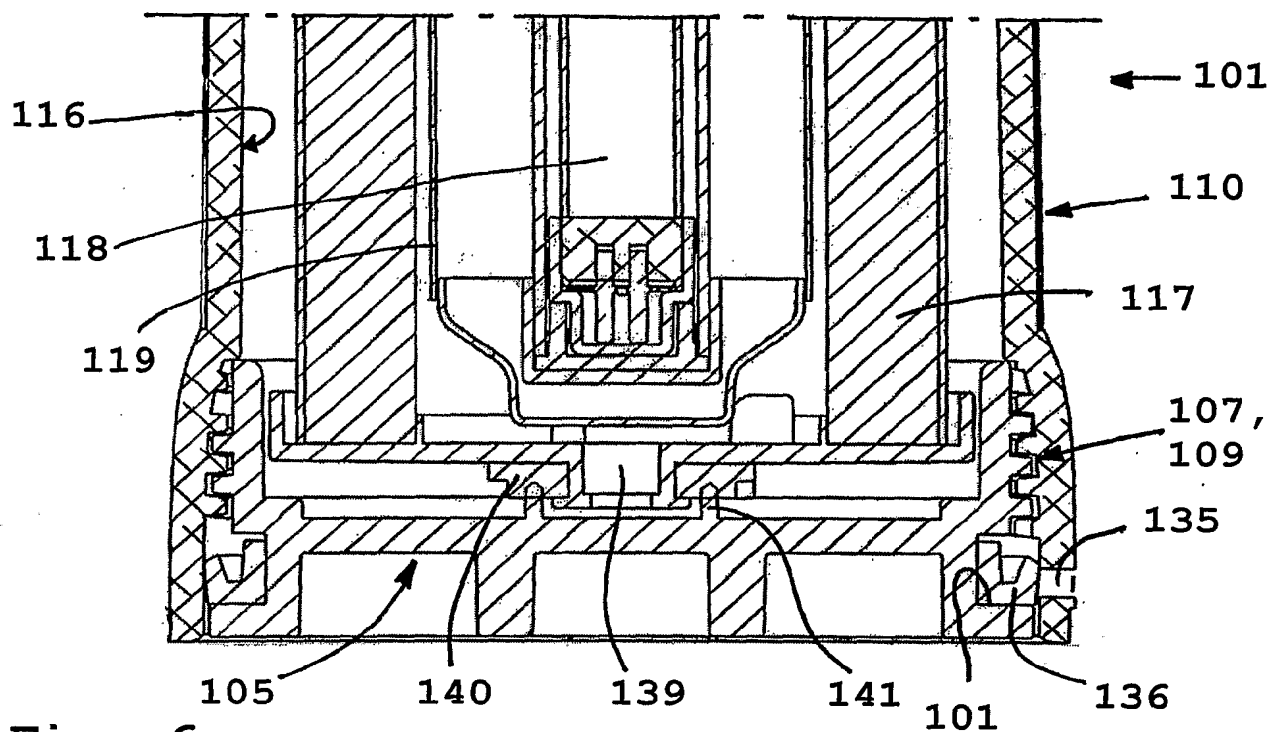


Fig. 6

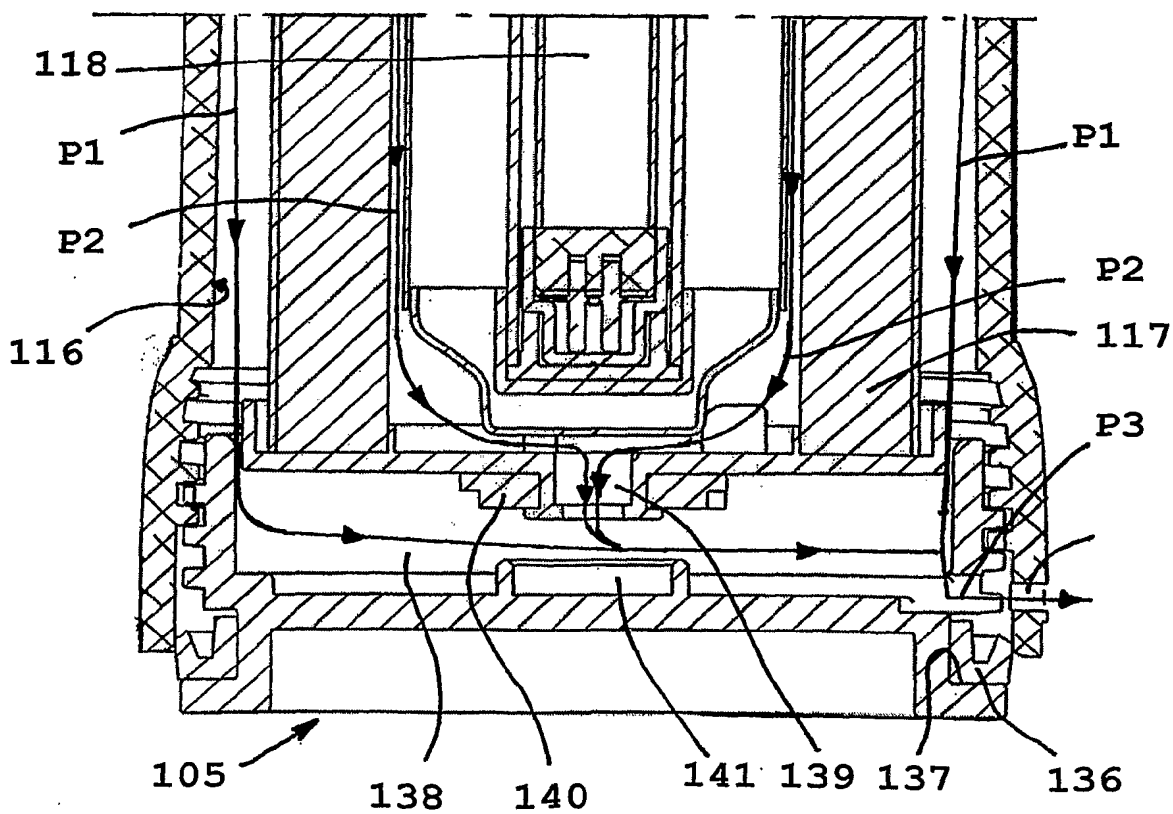

6/6

Fig. 7

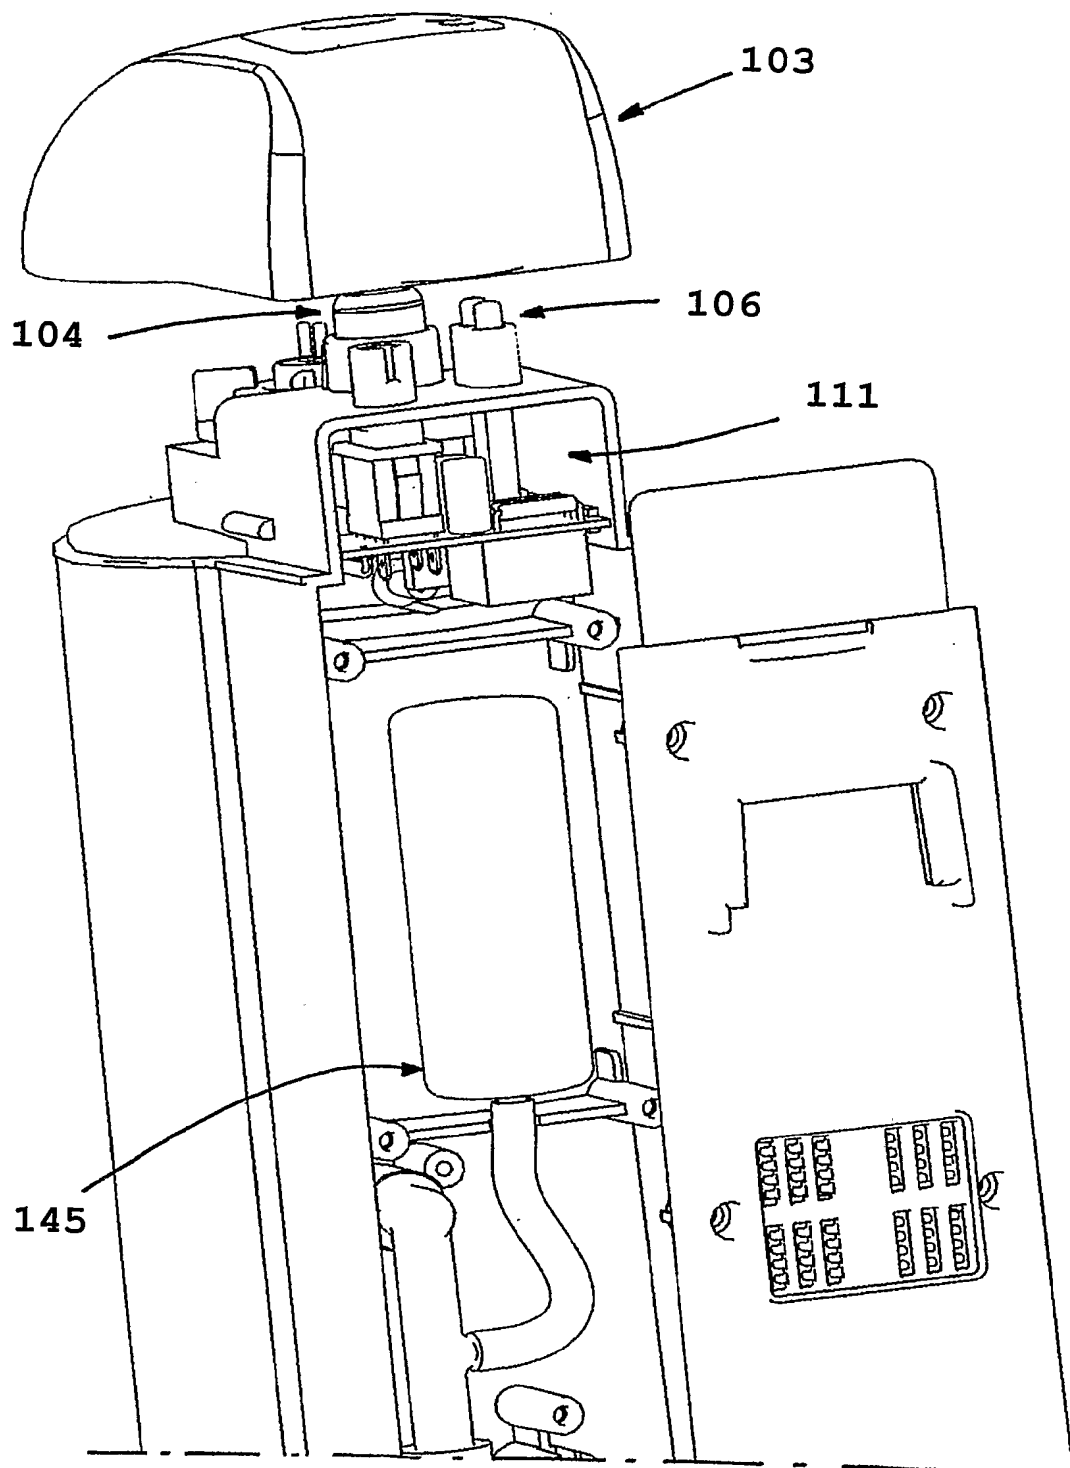

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2005/001837

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5266215 A (ROLF ENGELHARD), 30 November 1993 (30.11.1993), column 2, line 59 - line 63; column 4, line 15 - line 20, figure 1, abstract --	1-10
A	WO 0078681 A2 (AMWAY CORPORATION), 28 December 2000 (28.12.2000), page 21, line 30 - page 24, line 1, figures 26 A-C, 37, abstract --	1-10
A	WO 0006499 A1 (AMWAY CORPORATION), 10 February 2000 (10.02.2000), page 4, line 15 - line 21; page 21, line 28 - page 22, line 24, figures 1-4, claims 1-14, abstract --	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 March 2006

Date of mailing of the international search report

09-03-2006

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No.: +46 8 666 02 86

Authorized officer

Jens Waltin/MP

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2005/001837

International patent classification (IPC)
C02F 1/32 (2006.01)

Download your patent documents at www.prv.se

Cited patent documents can be downloaded at www.prv.se by following the links e-tjänster/anförda dokument. Use the application number as username. The password is **raw6plbo8v**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2005/001837

US	5266215	A	30/11/1993	AT	195703	T	15/09/2000
				AU	679225	B	26/06/1997
				AU	6555094	A	21/11/1994
				BR	9406437	A	09/01/1996
				CA	2160355	A,C	10/11/1994
				CN	1102912	B,C	12/03/2003
				CN	1121702	A	01/05/1996
				DE	69425653	D,T	19/04/2001
				EP	0696258	A,B	14/02/1996
				ES	2150490	T	01/12/2000
				FI	955102	A	26/10/1995
				JP	3312736	B	12/08/2002
				JP	8509420	T	08/10/1996
				NO	954281	A	26/10/1995
				NZ	265184	A	27/07/1997
				PL	311271	A	05/02/1996
				WO	9425401	A	10/11/1994

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2005/001837

WO	0078681	A2	28/12/2000	AU	5487800	A	09/01/2001
				AU	5489300	A	09/01/2001
				CA	2374291	A	28/12/2000
				CA	2375336	A	28/12/2000
				CN	1157338	C	14/07/2004
				CN	1370134	A,T	18/09/2002
				CN	1478726	A	03/03/2004
				CN	1486934	A	07/04/2004
				CN	1486935	A	07/04/2004
				CN	1488582	A	14/04/2004
				CN	1620406	A	25/05/2005
				HK	1047573	A	25/02/2005
				JP	2003502153	T	21/01/2003
				JP	2003529442	T	07/10/2003
				JP	2005224801	A	25/08/2005
				JP	2005270979	A	06/10/2005
				JP	2005279649	A	13/10/2005
				JP	2005313173	A	10/11/2005
				JP	2005322642	A	17/11/2005
				TW	538007	B	21/06/2003
				US	6436299	B	20/08/2002
				US	6451202	B	17/09/2002
				US	6491868	B	10/12/2002
				US	6514420	B	04/02/2003
				US	6569319	B	27/05/2003
				US	6669838	B	30/12/2003
				US	6673250	B	06/01/2004
				US	6731071	B	04/05/2004
				US	6793817	B	21/09/2004
				US	6812645	B	02/11/2004
				US	6825620	B	30/11/2004
				US	6831417	B	14/12/2004
				US	20020011434	A	31/01/2002
				US	20020014461	A	07/02/2002
				US	20020162779	A	07/11/2002
				US	20020189986	A	19/12/2002
				US	20030015478	A	23/01/2003
				US	20030015479	A	23/01/2003
				US	20030201731	A	30/10/2003
				US	20030214255	A	20/11/2003
				US	20030214256	A	20/11/2003
				US	20030214257	A	20/11/2003
				US	20040130915	A	08/07/2004
				US	20040130916	A	08/07/2004
				US	20040182761	A	23/09/2004
				US	20050007067	A	13/01/2005
				US	20050093475	A	05/05/2005
				US	20050116650	A	02/06/2005
				US	20050122058	A	09/06/2005
				US	20050122059	A	09/06/2005
				US	20050127849	A	16/06/2005
				US	20050127850	A	16/06/2005
				WO	0078678	A	28/12/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2005/001837

WO	0006499	A1	10/02/2000	AU	5461599	A	21/02/2000
				CN	1153733	C	16/06/2004
				CN	1314872	A,T	26/09/2001
				CN	1528676	A	15/09/2004
				CN	1528677	A	15/09/2004
				CN	1530330	A	22/09/2004
				CN	1539750	A	27/10/2004
				CN	1546388	A	17/11/2004
				HK	1038551	A	10/12/2004
				TW	528734	B	21/04/2003
				US	5962323	A	05/10/1999
				US	6245229	B	12/06/2001
				US	6533930	B	18/03/2003
				US	6716343	B	06/04/2004
				US	6716345	B	06/04/2004
				US	6726839	B	27/04/2004
				US	6773587	B	10/08/2004
				US	6811691	B	02/11/2004
				US	6949185	B	27/09/2005
				US	20030000878	A	02/01/2003
				US	20030000879	A	02/01/2003
				US	20030000880	A	02/01/2003
				US	20030006180	A	09/01/2003
				US	20030010695	A	16/01/2003
				US	20030019803	A	30/01/2003
